

# MODEL BCF80-HC CHEST FREEZER





#### **Painted Galvanized Steel Exterior**

Minimize dents, scratches and rust





# Temperature range between $-10^{\circ}F \sim 0^{\circ}F$

Air guard on rear wall ensures proper air circulation and cooling.



#### **Hydrocarbon refrigerants (R-290)**

increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion





# Cabinet Dimensions (inches/mm)

L D H
79 3/8" 30" 33"
2017mm 761.5mm 839mm

Weight (lbs/kg)

Net Weight 256 lbs 116 kg Ship Weight 311 lbs 141 kg

## Cabinet construction

- Epoxy coated wire baskets to minimize peeling and rust
- Polyurethane insulation CFC free, high density insulation foam which is eco friendly and energy efficient
- Bottom drain with plug for easy cleaning
- Sliding door lock with keys with additional security
- Four (4) standard casters


### Refrigeration


 Bottom mount compressor system – The bottom mounted compressor provides quick and easy maintenance

## Design & Features


- Digital Temperature control for reliable temperature operation
- Treated curved glass sliding door to enhance cooling
- Anti-fog tempered glass provides a clear view of the interior

Front view Side view

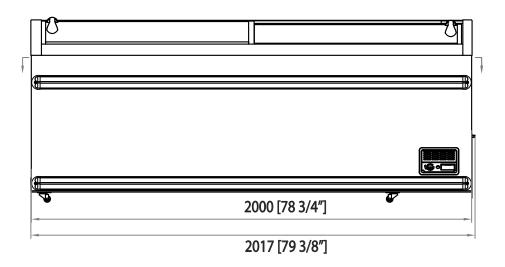



Top view

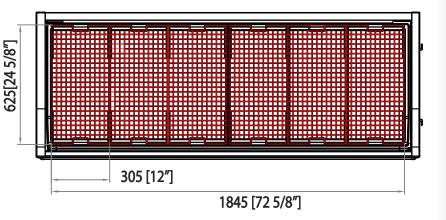

Basket 6 Capacity 24.72 Cu.Ft. Doors 2 Refrigerant R-290 -10°F ~ 0°F Easy Sliding Maintenance **Condensing Unit** 9.8 ft long (3m) flexible three Connection wire cord with modeled plug HP 3/4 Voltage 115V/60Hz **Amps** 3.8 **NEMA Config.** NEMA 5-20 Lighting Interior LED lighting



- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.
   Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par TEsat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.



Blue Air has right to change specifications without further notice.







1-886-677-8500

