DOUBLE GLASS DOOR MERCHANDISER
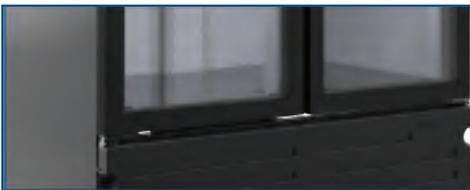
MODEL: VC43

PRO·KOLD

Product Features

- Easy access to the condensing unit for cleaning
- Double pane glass doors offer greater insulation and resistance, which helps optimize the use of energy
- Digital control for easy read-out and temperature adjustment
- Self-closing door to reduce heat transfer and save energy
- Easy to clean stainless steel floor
- Adjustable shelves to suit your display needs
- LED lighting for optimal product display
- Coolant friendly to the environment

Accessories

- Casters
- Preparation for heavy duty wheels for easy displacement (sold as accessory does not include installation)

Product highlights

Stainless steel floor

Adjustable grills

Space for advertising

Certifications

UL NSF® ENERGY STAR

Warranty

- 2 Years Parts and labor
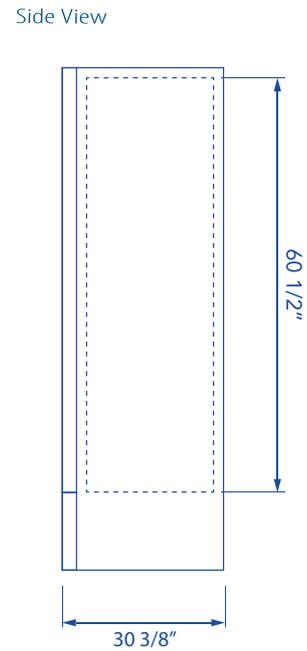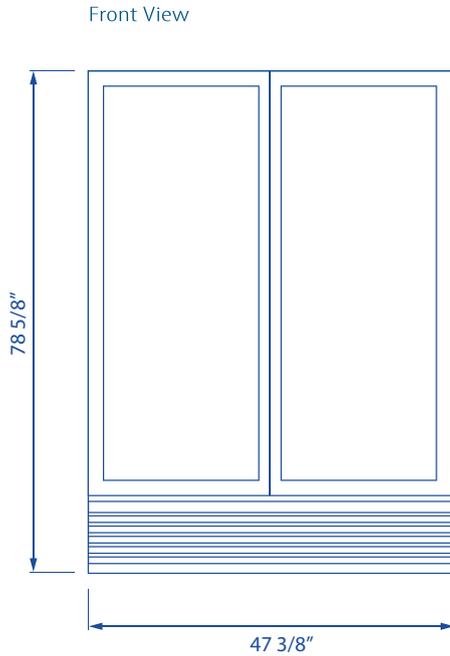- Additional 3 years compressor coverage

Residential: Assumes on liabillity for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

PRO·KOLD

MODEL: VC43

Plan view

Front View

Side View

78 5/8"

60 1/2"

47 3/8"

30 3/8"

Technical data

Dimensions

External Dimensions	W: 47 3/8" D: 30 3/8" H: 78 5/8"
Internal Dimensions	W: 43 1/8" D: 21 3/4" H: 59 5/8"
Usable Internal	W: 42 5/8" D: 19 3/4" H: 48 3/4"
Net volume	23.81 ft3 (674.32 Lts.)
Net weight	430.78 Lbs.
Gross weight	445.3 Lbs.
Packaging dimensions	W: 48 1/4" D: 32" H: 81 1/8"

Performance data

Refrigerant charge	2.99 oz
Energy consumption	3.123 kwh/24h
Compressor power	1/2 HP
Condenser	Finless
Evaporator	Dynamic

Construction

Exterior material	Coated steel
Interior material	Aluminum
Door type	Glass swing

Electrical data

Power supply	110v/ 60 Hz
Amps	8.3
Length of Cord	118" 3000 mm
Lighting	241 LUX 18 modules
LED per module	8
Plug type	PC-731

Cooling

Temperature range	36°F - 41°F
Refrigerant	R290
Max. ambient temperature	90° F
Defrosting	Automatic
Temperature controller	Digital

Logistic data

Trailer Loads	53´:40 40´:28
Unit Weight with packaging	445.3 Lbs. (202 kg)
Dimensions with packaging	W: 48 1/4" D: 32" H: 81 1/8"

* W= Width, D= Depth, H= Height