



COMMERCIAL

Refrigeration Equipment 2 Sliding Glass Door Merchandiser Refrig. 48 cu.ft. +33/+41 F (R290)

ITEM #

MODEL #

NAME #

SIS #

AIA #



738319 (KCHSGM48R)

2-Sliding Glass Door
Merchandiser Refrig. 48 CU.
FT +33/+41°F-R290

Short Form Specification

Item No.

48 CU.FT. 2-sliding glass door refrigerator with exterior back and bottom panel in galvanized steel, exterior side, and top in painted steel; interior back, side top and bottom panels in 304 stainless steel. Electronic control. R290 gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

Main Features

- External digital temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Heavy duty Vinyl coated steel shelves.
- Interior LED light to save energy and for best internal visibility.

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty rails for sliding doors

APPROVAL:


Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

Front

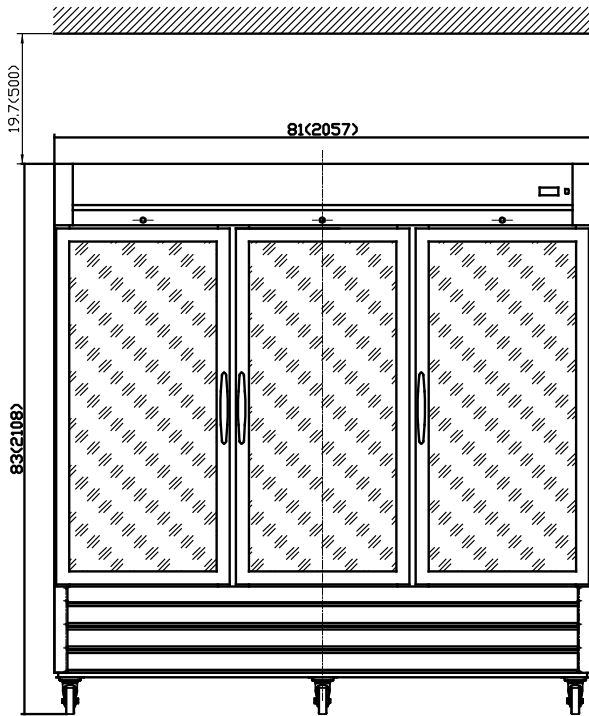

Side

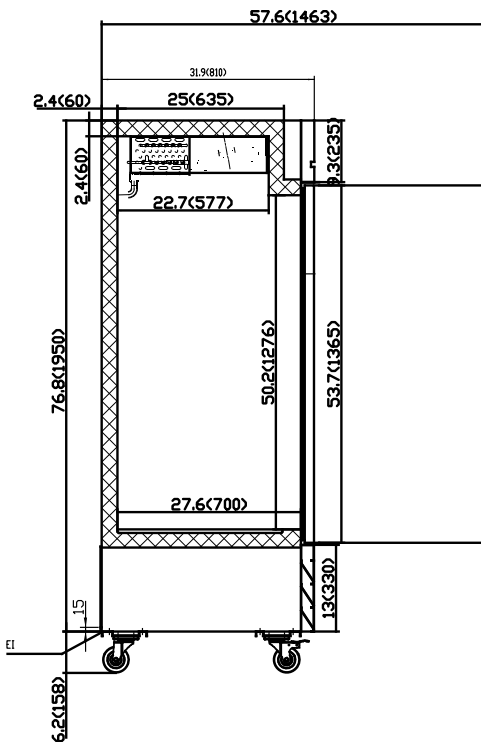

EI = Electrical connection

Electric

Supply voltage:

738319 (KCHSGM48R) 115 V/1 ph/60 Hz

Electrical power, max:

0.5 kW

Defrost Power

Plug type:

NEMA 5-15

Maximum Over-Current Protection (MOP):

0A

Capacity:

Gross capacity:

Key Information:

Capacity:

External dimensions, Width: 53 15/16" (1370 mm)

External dimensions, Depth: 31 7/8" (810 mm)

External dimensions, Height: 83 1/2" (2121 mm)

Internal Dimensions (depth):

Internal Dimensions (height):

Internal Dimensions (width):

Shipping height: (2180 mm)

Shipping weight: lbs (277 kg)

Shipping volume: ft³ (2.72 m³)

Refrigeration Data

Operating temperature min.:

Operating temperature max.:

Sustainability

Current consumption:

4.5 Amps

Refrigerant type:

R290