

COMMERCIAL

Refrigeration Equipment 3-Door Sandwich/Salad Prep Table 70" Long 18-1/6 Pan



| TEM # | |
|---------|--|
| | |
| NODEL # | |
| | |
| IAME # | |
| | |
| SIS # | |
| | |
| NA # | |
| | |

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 18 1/6 pans.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL:



43.2''-1097.5mm

T

.3"-235.5mm

 σ

30.8"-782mm

U

<u>37.8''-961mm</u>

<u>29.9''-760mm</u> 18.5''-470mm

2.3"–58mm

71.7''-1822mm

51.2"-1300mm


26.8"-680mm

T

Refrigeration Equipment 3-Door Sandwich/Salad Prep Table 70" Long 18-1/6 Pan

T

| Front | Electric | |
|-------|---|--|
| | Supply voltage: 738258 (KCHST70.18) Electrical power, max: Plug type: | 115 V/1 ph/60 Hz 0.7 kW NEMA 5-15 |
| | Capacity: | |
| | Gross capacity: | 18 cu.feet |
| | Key Information: | |
| Side | Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material: | 1 Left+2 Right 71 3/4" (1822 mm) 29 15/16" (760 mm) 43 3/16" (1097.5 mm) 3 Full 23 13/16" 23 1/2" 66 7/16" 47 1/4" (1200 mm) 419 lbs (190 kg) 63.12 ft ³ (1.79 m ³) 3 - 538x425/580x425 Stainless Steel 304 AISI |
| | Warranty: | 3 / 5 years |
| | Refrigeration Data | |
| | Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type: | 32 °F 41 °F Fin & tube Auto Defrost |
| | Sustainability | |
| | Refrigerant type: | R290 |
| Тор | | |

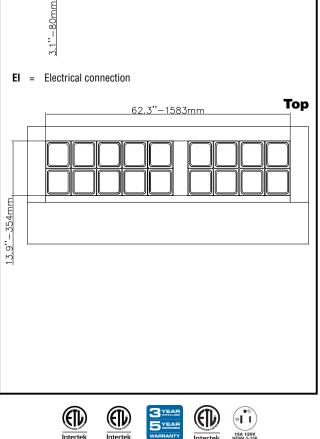

Intertek

Intertek

15A 125V NEMA 5-15P

Intertek

Refrigeration Equipment 3-Door Sandwich/Salad Prep Table 70" Long 18-1/6 Pan

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.