

SELF-CONTAINED, FRESH RED MEAT DISPLAY

MODEL: MCSC 100W

PRO-KOLD

Product features

- ⦿ (2) Fully adjustable, upper shelves for additional display level
- ⦿ Lower wire grill covers to keep meat off display deck and assist with proper hygiene
- ⦿ Double pane, tempered, curved glass for maximum display view
- ⦿ Adjustable feet to raise and lower box
- ⦿ Sliding, working table included with support rail on service side of display
- ⦿ Large capacity, rear, undercounter storage area with swing door access
- ⦿ (4) Rear, sliding glass doors to access display
- ⦿ Gravity coil cooling system in upper level to promote longevity of product
- ⦿ Fully self-contained unit. No additional refrigeration unit required
- ⦿ LED lighting for optimal product display
- ⦿ Corrosion resistant, white finish interior with stainless steel top




Available Color

WHITE

Accessories

- ⦿ Stainless steel fish trays

Product highlights

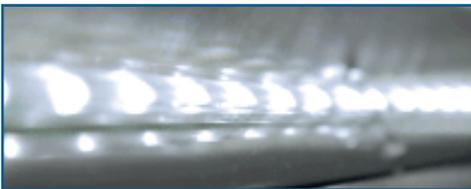

LED Lighting



Sliding, rear work table



Rear, undercounter storage

Certifications



Warranty


- ⦿ 2 year parts and labor
- ⦿ Additional 3 year compressor coverage

Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

PRODUCT SPECIFICATIONS

MODEL: MCSC 100W

Plan view

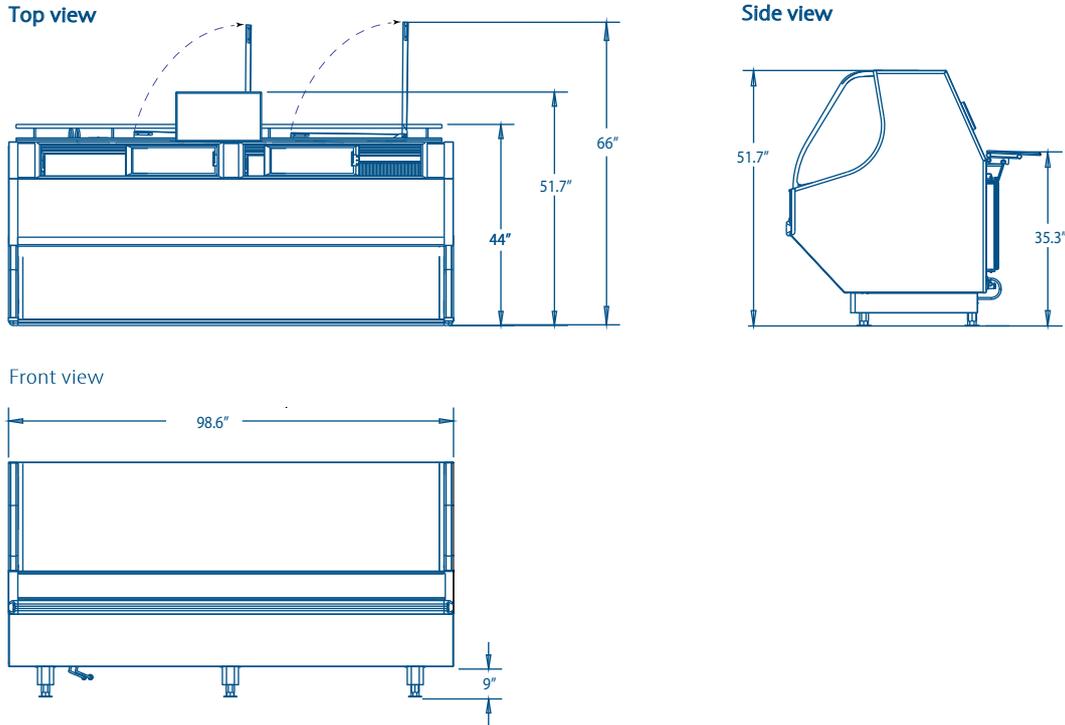

Technical data

Dimensions

External dimensions	W: 98.6" D: 44" H: 51.7"
Internal dimensions	W: 94.51" D: 33" H: 21.21"
Net volume	30.58 ft3 866 lts
Net Weight	883.17Lbs
Gross weight	1001.12 Lbs.
Packaging dimensions	W: 107 1/8" D: 50 4/5" H: 55 3/8"

Performance data

Refrigerant charge	31.75 Oz.
Energy consumption	Not available.
Evaporator	Natural
Evaporation temperature	-.04° F
Expansion method	Expansion valve
Thawing method	Hot gas

Construction

Exterior material	Pre-painted sheet metal
Interior material	Pre-painted sheet metal
Number of interior shelf levels	2
Shelf material	Pre-painted steel
Door type	Sliding glass (upper), Solid (lower)
Door quantity	Upper (4), Lower (2)

Electrical data

Power supply	115V / 60Hz.
Amps	14.3 A
Length of cord	66.92" 1700 mm
Lighting	LED
Plug type	NEMA-5-15P
Controller	ERC 112
Compressor power	1 1/4 HP 932 W

Cooling

Temperature range	32°F to 46.4°F (Exhibition)
Refrigerant	R404a
Cut In	26.6°F (-3°C)
Cut Out	21.2°F (-6°C)
Condenser	Forced

Logistic data

Trailer Loads	12 fit on a 53' trailer
Trailer Loads	11 fit on a 48' trailer
Unit weight with packaging	1001.12 Lbs..
Dimensions with packaging	W: 107 1/8" D: 50 4/5" H: 55 3/8"

* W= Width, D= Depth, H= Height