



Customer _____


Job Number _____

E3270NG-1
E3270NG-2
E3270NG-3

EDGE3270 Oven Cut-sheet

General Information:

EDGE-3270 ovens are designed to be stacked up to three high. Each oven has a 32" wide conveyor belt and a 70" long baking chamber. These ovens require a 116" wide exhaust hood. CAEnergyWise rebate qualified, achieving 46% energy efficiency at 219 lbs/hr.

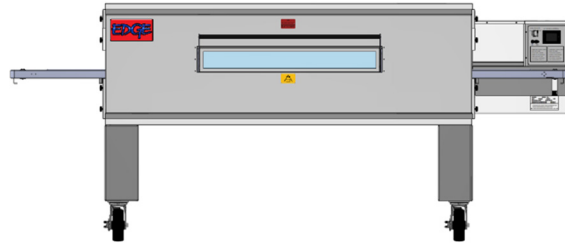

E3270NG-1
E3270NG-2
E3270NG-3

STANDARD FEATURES:

- **INTELLIGENT DIAGNOSTICS:** The diagnostic features of the G2 Control system brings the serviceability of the EDGE oven to a new level. Information flows from the oven components to this innovative control, allowing for exceptionally fast diagnostics and performance evaluation.
- **RECIPE DRIVEN MENU:** The G2 Control system is more than just a pretty screen that responds to your touch. 30 recipes can be configured to meet the demands of your business. Recipes can be copied from oven to oven and even from store to store.
- **CONTROL SYSTEM LOCK:** A custom access PIN can be setup to prevent recipe tampering and help ensure that the product your customer expects, is the product they receive.
- **LOW OPERATING COSTS:** This high efficiency system is proven winner in both operating costs and in reliability. Operation of the EDGE3270 can be as little as \$0.423 per hour! (Estimate based on an MCF price of \$6.80 and a KWh price of \$0.12. Estimate calculated after a 1 hour pre-heat.)
- **RELIABILITY:** The G2 Control system takes a leap forward in service and reliability. Belt Jam Detection prevents costly damage due to misplaced objects. Critical components are monitored and information is brought forward for viewing, reducing down-time and wasted service visits. The EDGE conveyor system uses a high quality brushless motor, eliminating brush replacement.
- **CONSTRUCTION:** EDGE3270 ovens are manufactured to exacting tolerances and use stainless steel inside and out. The EDGE oven still has welded corners, a testament to our dedication to quality and traditional craftsmanship.
- **SPLIT BELT OPTION:** For additional flexibility, the EDGE3270 can be configured with a split belt. The split belt has an independent control, allow both timing and direction to be modified.
- **WARRANTY:** EDGE3270 ovens come with a STANDARD FIVE YEAR Warranty.



MF&B RESTAURANT SYSTEMS, INC.
119 ICMI RD STE 300 • DUNBAR, PA 15431
1.888.430.EDGE • www.edgeovens.com




Customer _____


Job Number _____

E3270NG-1
E3270NG-2
E3270NG-3


E3270NG-1
E3270NG-2
E3270NG-3

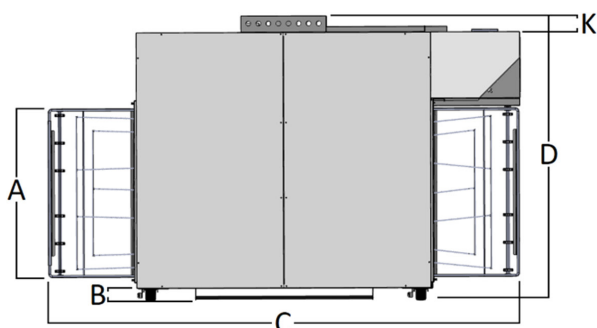


OVEN TOP VIEW

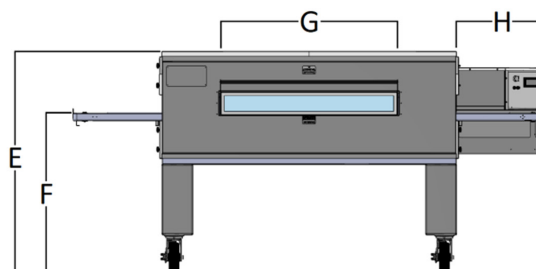

SINGLE FRONT VIEW

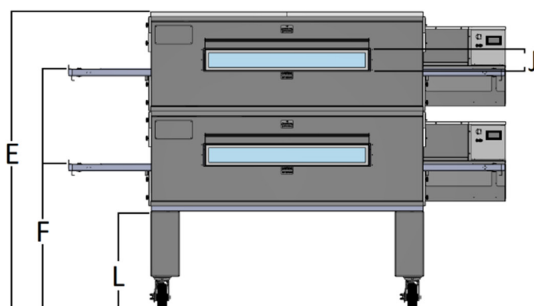

DOUBLE FRONT VIEW

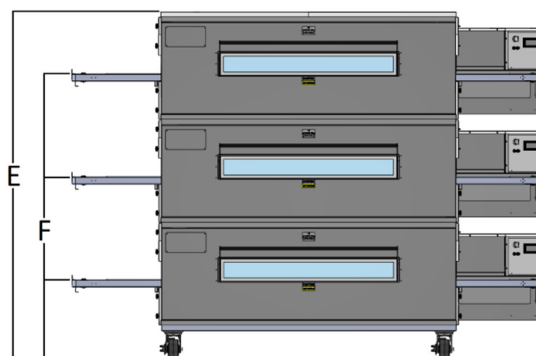

TRIPLE FRONT VIEW

ALL MEASUREMENTS IN INCH	SINGLE	DOUBLE	TRIPLE		SINGLE	DOUBLE	TRIPLE
A CHAMBER (W)	33.5"	33.5"	33.5"	G WINDOW (L)	35.0"	35.0"	35.0"
B WINDOW (D)	2.4"	2.4"	2.4"	H CONT. CAB. (L)	17.8"	17.8"	17.8"
C CONVEYOR (L)	103.8"	103.8"	103.8"	J CHAMBER (H)	3.5"	3.5"	3.5"
D OVEN (D)	57.1"	57.1"	57.1"	K MOTOR (D)	3.8"	3.8"	3.8"
E FLOOR-OVEN (H)	44.0"	64.1"	68.5"	L LEG/CASTER (H)	21.5"	21.5"	5.8"
F FLOOR-CONVEYOR (H) B	31.5"	31.5"	15.5"	*CHAMBER (L)	68.5"		
M		52.0"	36.0"	*CHAMBER W/PLUGS (L)	69.5"		
T			56.3"	WEIGHT PER PACKAGED OVEN	978 LBS ~ 1198 LBS		

GAS TYPE	VOLTS	FREQUENCY	AMPS	SUPPLY PRESSURE	BTU/HR RATING	MANIFOLD PRESSURE
NATURAL	120	60 HZ	9.5	6" - 8" WC	185,000	4.5" WC
PROPANE	120	60 HZ	9.5	10" - 13" WC	185,000	10" WC



MF&B RESTAURANT SYSTEMS, INC.
119 ICMI RD STE 300 • DUNBAR, PA 15431
1.888.430.EDGE • www.edgeovens.com